

E-PACE

JAGUAR



TECHNICAL SPECIFICATION  
OCTOBER 2023

# E-PACE - TECHNICAL SPECIFICATION

	DIESEL		DIESEL MHEV	
	D165	D165	D165	D200
<b>POWERTRAIN</b>				
Mild Hybrid Electric Vehicle (MHEV)	-	■	■	■
Transmission	Manual	Automatic	Automatic	Automatic
Driveline: All Wheel Drive (AWD) or Front Wheel Drive (FWD)	FWD	AWD	AWD	AWD
Maximum power (PS / kW / rpm)	163 / 120 / 3.750	163 / 120 / 3.750	163 / 120 / 3.750	204 / 150 / 3.750
Maximum torque (Nm / rpm)	380 / 1.500-2.500	380 / 1.500-2.500	380 / 1.500-2.500	430 / 1.750-2.500
Capacity (cc)	1998	1998	1998	1998
No. of cylinders / Valves per cylinder	4 / 4	4 / 4	4 / 4	4 / 4
Cylinder layout	In-line	In-line	In-line	In-line
Bore / stroke (mm)	83 / 92,31	83 / 92,31	83 / 92,31	83 / 92,31
Compression ratio (:1)	16,5+ / -0,5	16,5+ / -0,5	16,5+ / -0,5	16,5+ / -0,5
<b>PERFORMANCE</b>				
Acceleration (secs) 0-100 km/h (0-60mph)	10 (9,5)	9,8 (9,2)	9,8 (9,2)	8,4 (7,9)
Maximum speed km/h (mph)	206 (128)	200 (124)	200 (124)	211 (131)
<b>BRAKES</b>				
Front type	17" wheels - Single Piston Sliding Caliper, Vented Disc 18"-21" wheels - Twin Piston Sliding Caliper, Vented Disc		Twin Piston Sliding Caliper, Vented Disc	
Front diameter (mm)	17" wheels - 325 18"-21" wheels - 349		349	
Rear type	Single Piston Sliding Caliper, Solid Disc		Single Piston Sliding Caliper, Solid Disc	
Rear diameter (mm)	300	300	300	300
Park Brake	iEPB, Motor on Caliper		iEPB, Motor on Caliper	

## E-PACE – TECHNICAL SPECIFICATION

	DIESEL		DIESEL MHEV	
	D165	D165		D200
<b>WEIGHTS (kg)*</b>				
Unladen weight (EU)**	1.809	1.916		1.952
Unladen weight (DIN)†	1.734	1.841		1.877
Gross Vehicle Weight (GVW)	2.360	2.470		2.470
<b>TOWING (kg)</b>				
Unbraked trailer	750	750		750
Maximum towing	1.600	1.800 (EU & ROW)		2.000 (EU & ROW) / 1.800 (AUS)
Maximum coupling point (nose weight)	100	100		100
Maximum vehicle and trailer combination	3.960	4.270		4.470 (EU & ROW) / 4.270 (AUS)
<b>ROOF CARRYING (kg)</b>				
Maximum roof load (including cross bars)	75	75		75

\*Weights reflect vehicles to standard specifications. Optional extras increase weight. \*\*Includes a 75kg driver, full fluids and 90 percent fuel. †Includes full fluids and 90 percent fuel.

# E-PACE - TECHNICAL SPECIFICATION

			DIESEL		DIESEL MHEV	
FUEL ECONOMY			D165	D165	D200	
Fuel tank capacity -useable litres			65	65	65	
Diesel Particulate Filter (DPF)			■	■	■	
WLTP*						
WLTP Consumption	Low	l/100km (mpg)	7,5-8,2 (37,7-34,6)	7,5-8,2 (37,5-34,6)	7,5-8,2 (37,4-34,3)	
	Medium	l/100km (mpg)	5,9-6,5 (47,7-43,6)	6,5-7,1 (43,5-39,8)	6,5-7,2 (43,4-39,1)	
	High	l/100km (mpg)	5,0-5,5 (55,9-51,1)	5,5-5,9 (51,4-48,0)	5,5-6,1 (51,3-46,7)	
	Extra High	l/100km (mpg)	6,2-6,6 (45,8-43,1)	6,4-6,8 (44,3-41,5)	6,4-7,1 (44,3-39,6)	
	Combined	l/100km (mpg)	6,0-6,4 (47,5-43,9)	6,3-6,8 (45,0-41,8)	6,3-7,0 (44,9-40,5)	
WLTP CO <sub>2</sub> Emissions	Low	(g/km)	196-214	197-214	198-216	
	Medium	(g/km)	155-170	170-186	170-189	
	High	(g/km)	132-145	144-154	144-159	
	Extra High	(g/km)	161-171	167-178	167-187	
	Combined	(g/km)	156-168	165-177	165-183	

■ Standard.

\*The figures provided are as a result of official manufacturer's tests in accordance with EU legislation. For comparison purposes only. Real-world figures may differ. CO<sub>2</sub> and fuel economy figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment and accessories fitted.

# E-PACE - TECHNICAL SPECIFICATION

	<b>DIESEL</b>	
<b>POWERTRAIN</b>	<b>D165</b>	<b>D200</b>
Mild Hybrid Electric Vehicle (MHEV)	-	-
Transmission	Automatic	Automatic
Driveline: All Wheel Drive (AWD) or Front Wheel Drive (FWD)	AWD	AWD
Maximum power (PS / kW / rpm)	163 / 120 / 3.750	199 / 146 / 3.750
Maximum torque (Nm / rpm)	380 / 1.500-2.500	430 / 1.750-2.500
Capacity (cc)	1998	1998
No. of cylinders / Valves per cylinder	4 / 4	4 / 4
Cylinder layout	In-line	In-line
Bore / stroke (mm)	83 / 92,31	83 / 92,31
Compression ratio (:1)	16,5+ / -0,5	16,5+ / -0,5
<b>PERFORMANCE</b>		
Acceleration (secs) 0-100 km/h (0-60mph)	9,8 (9,2)	8,4 (7,9)
Maximum speed km/h (mph)	200 (124)	211 (131)
<b>BRAKES</b>		
Front type	17" wheels - Single Piston Sliding Caliper, Vented Disc 18"-21" wheels - Twin Piston Sliding Caliper, Vented Disc	Twin Piston Sliding Caliper, Vented Disc
Front diameter (mm)	17" wheels - 325 18"-21" wheels - 349	349
Rear type	Single Piston Sliding Caliper, Solid Disc	Single Piston Sliding Caliper, Solid Disc
Rear diameter (mm)	300	300
Park Brake	iEPB, Motor on Caliper	iEPB, Motor on Caliper

## E-PACE - TECHNICAL SPECIFICATION

	DIESEL	
<b>WEIGHTS (kg)*</b>	<b>D165</b>	<b>D200</b>
Unladen weight (EU)**	1.884	1.920
Unladen weight (DIN)†	1.809	1.845
Gross Vehicle Weight (GVW)	2.470	2.470
<b>TOWING (kg)</b>		
Unbraked trailer	750	750
Maximum towing	1.800 (EU & ROW)	2.000 (EU) / 1.800 (AUS)
Maximum coupling point (nose weight)	100	100
Maximum vehicle and trailer combination	4.270	4.470 (EU & ROW) / 4.270 (AUS)
<b>ROOF CARRYING (kg)</b>		
Maximum roof load (including cross bars)	75	75

\*Weights reflect vehicles to standard specifications. Optional extras increase weight. \*\*Includes a 75kg driver, full fluids and 90 percent fuel. †Includes full fluids and 90 percent fuel.

# E-PACE - TECHNICAL SPECIFICATION

			DIESEL	
FUEL ECONOMY			D165 [1]	D200 [1]
Fuel tank capacity - useable litres			65	65
Diesel Particulate Filter (DPF)			■	■
Driveline			AWD	AWD
Consumption	Combined	l/100km (mpg)	5,9	5,9
CO <sub>2</sub> Emissions	Combined	(g/km)	155	155

■ Standard.

[1] The figures provided are NEDC calculated from official manufacturer's tests. Figures may vary according to environment and driving style. For comparison purposes only. Real-world figures may differ.

# E-PACE - TECHNICAL SPECIFICATION

POWERTRAIN	PETROL MHEV		
	P160	P200	P250
Mild Hybrid Electric Vehicle (MHEV)	■	■	■
Transmission	Automatic	Automatic	Automatic
Driveline: All Wheel Drive (AWD) or Front Wheel Drive (FWD)	FWD	AWD	AWD
Maximum power (PS / kW / rpm)	160 / 118 / 5.500	200 / 147 / 5.500	249 / 184 / 5.500
Maximum torque (Nm / rpm)	260 / 1.600-4.000	320 / 1.200-4.000	365 / 1.300-4.500
Capacity (cc)	1.498	1997	1997
No. of cylinders / Valves per cylinder	3 / 4	4 / 4	4 / 4
Cylinder layout	In-line	In-line	In-line
Bore / stroke (mm)	83 / 92,29	83 / 92,29	83 / 92,29
Compression ratio (:1)	10.5 +/- 0.5	10.8 +/- 0.5	10.8 +/- 0.5
<b>PERFORMANCE</b>			
Acceleration (secs) 0-100 km/h (0-60mph)	10,5 (9,9)	8,5 (8,0)	7,5 (7,0)
Maximum speed km/h (mph)	197 (122)	212 (132)	229 (142)
<b>BRAKES</b>			
Front type	17" wheels - Single Piston Sliding Caliper, Vented Disc 18"-21" wheels - Twin Piston Sliding Caliper, Vented Disc		Twin Piston Sliding Caliper, Vented Disc
Front diameter (mm)	17" wheels - 325 18"-21" wheels - 349		349
Rear type	Single Piston Sliding Caliper, Solid Disc		Single Piston Sliding Caliper, Solid Disc
Rear diameter (mm)	300		300
Park Brake	iEPB, Motor on Caliper		iEPB, Motor on Caliper



# E-PACE – TECHNICAL SPECIFICATION

	PETROL MHEV		
<b>WEIGHTS (kg)*</b>	<b>P160</b>	<b>P200</b>	<b>P250</b>
Unladen weight (EU)**	1.783	1.847	1.889
Unladen weight (DIN)†	1.708	1.772	1.814
Gross Vehicle Weight (GVW)	2.300	2.430	2.430
<b>TOWING (kg)</b>			
Unbraked trailer	-	750	750
Maximum towing	-	1.800	1.800
Maximum coupling point (nose weight)	-	100	100
Maximum vehicle and trailer combination	-	4.230	4.230
<b>ROOF CARRYING (kg)</b>			
Maximum roof load (including cross bars)	75	75	75

- Not available.

\*Weights reflect vehicles to standard specifications. Optional extras increase weight. \*\*Includes a 75kg driver, full fluids and 90 percent fuel. †Includes full fluids and 90 percent fuel.

# E-PACE - TECHNICAL SPECIFICATION

<b>FUEL ECONOMY</b>			<b>PETROL MHEV</b>		
			<b>P160</b>	<b>P200</b>	<b>P250</b>
Fuel tank capacity - useable litres			67	67	67
Gasoline Particulate Filter (GPF)			■	■	■
<b>WLTP*</b>					
WLTP Consumption	Low	l/100km (mpg)	10,0-10,3 (28,2-27,4)	11,5-11,8 (24,6-23,9)	11,5-11,8 (24,6-23,9)
	Medium	l/100km (mpg)	7,7-8,0 (36,6-35,5)	8,6-9,3 (33,0-30,5)	8,6-9,3 (32,8-30,5)
	High	l/100km (mpg)	6,6-6,9 (42,7-40,8)	7,3-8,1 (38,6-34,8)	7,3-8,1 (38,5-34,8)
	Extra High	l/100km (mpg)	8,1-8,6 (34,9-32,8)	8,4-9,6 (33,5-29,5)	8,5-9,6 (33,4-29,5)
	Combined	l/100km (mpg)	7,8-8,2 (36,1-34,5)	8,5-9,4 (33,2-30,2)	8,6-9,4 (33,0-30,2)
WLTP CO <sub>2</sub> Emissions	Low	(g/km)	227-233	260-268	260-268
	Medium	(g/km)	175-180	194-210	195-210
	High	(g/km)	150-157	166-184	166-184
	Extra High	(g/km)	183-195	191-217	192-217
	Combined	(g/km)	177-185	193-212	194-212

■ Standard.

\*The figures provided are as a result of official manufacturer's tests in accordance with EU legislation. For comparison purposes only. Real-world figures may differ. CO<sub>2</sub> and fuel economy figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment and accessories fitted.

# E-PACE - TECHNICAL SPECIFICATION

	PETROL	
POWERTRAIN	P200	P250
Mild Hybrid Electric Vehicle (MHEV)	-	-
Transmission	Automatic	Automatic
Driveline: All Wheel Drive (AWD) or Front Wheel Drive (FWD)	AWD	AWD
Maximum power (PS / kW / rpm)	200 / 147 / 5.500	249 / 184 / 5.500
Maximum torque (Nm / rpm)	320 / 1.200-4.000	365 / 1.300-4.500
Capacity (cc)	1997	1997
No. of cylinders / Valves per cylinder	4 / 4	4 / 4
Cylinder layout	In-line	In-line
Bore / stroke (mm)	83 / 92,29	83 / 92,29
Compression ratio (:1)	10.8 +/- 0.5	10.8 +/- 0.5
<b>PERFORMANCE</b>		
Acceleration (secs) 0-100 km/h (0-60mph)	8,5 (8,0)	7,5 (7,0)
Maximum speed km/h (mph)	212 (132)	229 (142)
<b>BRAKES</b>		
Front type	17" wheels - Single Piston Sliding Caliper, Vented Disc 18"-21" wheels - Twin Piston Sliding Caliper, Vented Disc	Twin Piston Sliding Caliper, Vented Disc
Front diameter (mm)	17" wheels - 325 18"-21" wheels - 349	349
Rear type	Single Piston Sliding Caliper, Solid Disc	Single Piston Sliding, Vented disc (South Africa & Brazil), Single Piston Sliding, Solid disc (all other markets)
Rear diameter (mm)	300	300
Park Brake	iEPB, Motor on Caliper	iEPB, Motor on Caliper

## E-PACE - TECHNICAL SPECIFICATION

	PETROL	
<b>WEIGHTS (kg)*</b>	<b>P200</b>	<b>P250</b>
Unladen weight (EU)**	1.815	1.857
Unladen weight (DIN)†	1.740	1.782
Gross Vehicle Weight (GVW)	2.430	2.430
<b>TOWING (kg)</b>		
Unbraked trailer	750	750
Maximum towing	1.800	1.800
Maximum coupling point (nose weight)	100	100
Maximum vehicle and trailer combination	4.230	4.230
<b>ROOF CARRYING (kg)</b>		
Maximum roof load (including cross bars)	75	75

\*Weights reflect vehicles to standard specifications. Optional extras increase weight. \*\*Includes a 75kg driver, full fluids and 90 percent fuel. †Includes full fluids and 90 percent fuel.

# E-PACE - TECHNICAL SPECIFICATION

			PETROL	
<b>FUEL ECONOMY</b>			<b>P200 [1]</b>	<b>P250 [1]</b>
Fuel tank capacity - useable litres			67	67
Gasoline Particulate Filter (GPF)			■	■
Driveline			AWD	AWD
Consumption	Combined	l/100km (mpg)	8,0	8,0
CO <sub>2</sub> Emissions	Combined	(g/km)	186	186

■ Standard.

[1] The figures provided are NEDC calculated from official manufacturer's tests. Figures may vary according to environment and driving style. For comparison purposes only. Real-world figures may differ.

# E-PACE - TECHNICAL SPECIFICATION

	<b>PETROL PHEV</b>
<b>POWERTRAIN</b>	<b>P300e</b>
Transmission	Automatic
Driveline: All Wheel Drive (AWD)	AWD
Maximum power (PS / kW / rpm)	309 / 227 / 5.500*
Maximum torque (Nm / rpm)	540 / 1.600-4.500*
Capacity (cc)	1.498
No. of cylinders / Valves per cylinder	3 / 4
Cylinder layout	In-line
Bore / stroke (mm)	83 / 92,29
Compression ratio (:1)	10.5 +/- 0.5
<b>PERFORMANCE</b>	
Acceleration (secs) 0-100 km/h (0-60mph)	6,5 (6,1)
Maximum speed km/h (mph)	216 (134)
<b>ELECTRIC MOTOR DATA</b>	
Maximum power (PS/kW)	109/80
Maximum torque (Nm)	260
<b>BRAKES</b>	
Front type	Twin Piston Sliding Caliper, Vented Disc
Front diameter (mm)	349
Rear type	Single Piston Sliding Caliper, Vented Disc
Rear diameter (mm)	325
Park Brake	iEPB, Motor on Caliper

\*When combined with electric motor.

# E-PACE - TECHNICAL SPECIFICATION

	<b>PETROL PHEV</b>
	<b>P300e</b>
<b>BATTERY AND CHARGING TIMES</b>	
Home Charger/Wall box 7kW	1,4h to 80%, 2,2h to 100%
DC Charger 50kW	30 mins to 80% (max rate 32kW)
Domestic Plug 2,3kW	5h to 80%, 6,7h to 100%
Battery capacity (Usable) kWh	11,6
Charging cable length (m)	5
<b>WEIGHTS (kg)*</b>	
Unladen weight (EU)**	2.173
Unladen weight (DIN)†	2.098
Gross Vehicle Weight (GVW)	2.670
<b>TOWING (kg)</b>	
Unbraked trailer	750
Maximum towing	1.600 (EU) / 1.500 (ROW)
Maximum coupling point (nose weight)	100
Maximum vehicle and trailer combination	4.270 (EU) / 4.170 (ROW)
<b>ROOF CARRYING (kg)</b>	
Maximum roof load (including cross bars)	75

\*Weights reflect vehicles to standard specifications. Optional extras increase weight. \*\*Includes a 75kg driver, full fluids and 90 percent fuel. †Includes full fluids and 90 percent fuel.

# E-PACE - TECHNICAL SPECIFICATION

			PETROL PHEV
			P300e
<b>FUEL ECONOMY</b>			
Fuel tank capacity - useable litres			57,6
Gasoline Particulate Filter (GPF)			■
EV Range TEH Combined (WLTP*) km (miles)			58 (36)
<b>WLTP*</b>			
WLTP Consumption	Low	l/100km (mpg)	-
	Medium	l/100km (mpg)	-
	High	l/100km (mpg)	-
	Extra High	l/100km (mpg)	-
	Combined	l/100km (mpg)	1,4-1,6 (200,3-177,7)
WLTP CO <sub>2</sub> Emissions	Low	(g/km)	-
	Medium	(g/km)	-
	High	(g/km)	-
	Extra High	(g/km)	-
	Combined	(g/km)	31-35

■ Standard - Not available.

\*The figures provided are as a result of official manufacturer's tests in accordance with EU legislation with a fully charged battery. For comparison purposes only. Real-world figures may differ. CO<sub>2</sub>, fuel economy, energy consumption and range figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment, accessories fitted, actual route and battery condition. Range figures are based upon production vehicle over a standardised route.



# E-PACE - DIMENSIONS

**Vehicle Height** - 1.648mm

**Headroom**

Maximum front / rear headroom

With Fixed metal roof fitted 976 / 974mm

With Panoramic roof fitted 996 / 970mm

**Legroom**

Maximum front legroom 1.018mm

Maximum rear legroom 872mm

**Loadspace Capacity**

Height 705mm, Width 1.311mm

Loadspace width between arches 1.057mm

Maximum loadspace volume behind first row

Dry\* 1.170 litres, Wet\*\* 1.386 litres

Maximum loadspace volume behind second row

Dry\* 494 litres, Wet\*\* 601 litres



**Turning Circle**

Kerb-to-kerb 11.63m

Wall-to-wall 12m

Turns lock-to-lock 2,31

Overall Width  
(inc. mirrors) 2.088mm  
(mirrors folded) 1.984mm

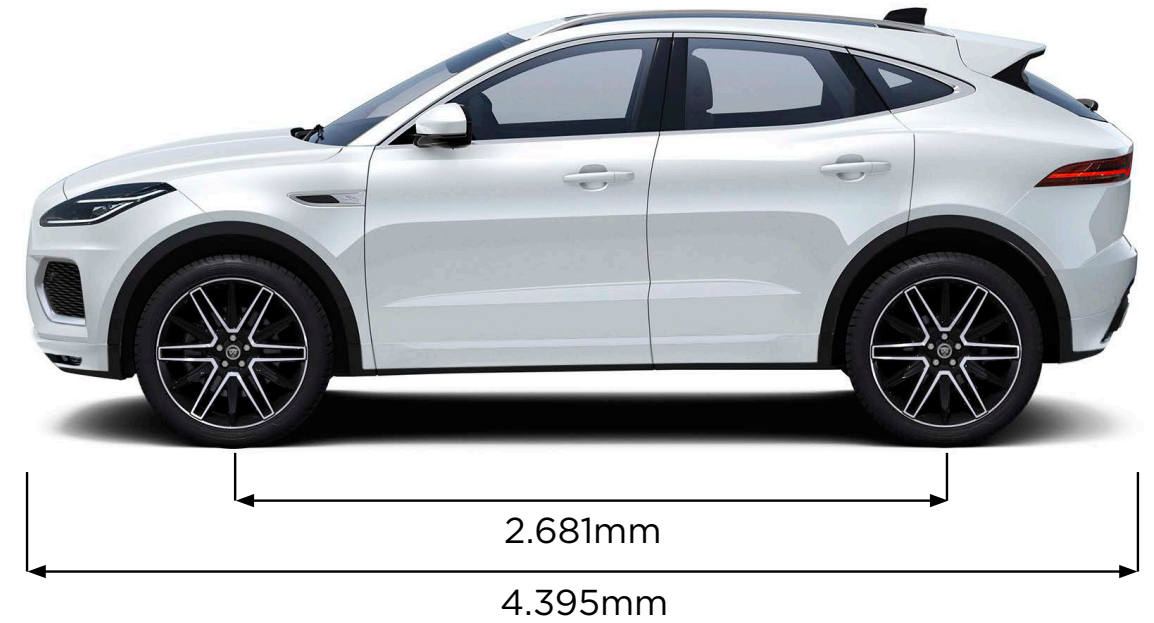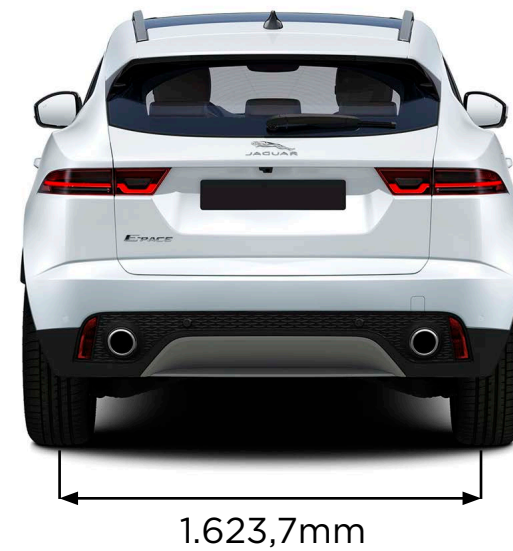

\*Dry: Volume as measured with VDA-compliant solid blocks (200mm x 50mm x 100mm).

\*\*Wet: Volume as measured by simulating the loadspace filled with liquid.

Dimensions were measured with vehicle at unladen weight.